

CATÁLOGO DE PRODUTOS RSE

PRODUTO: **CONECTOR JACK**


DC005 J4





RSE
Automação e Componentes Eletrônicos

CONECTOR JACK


Jack DC-005 J4 / P4 DC
Fêmea 2,1mm para Solda PCI

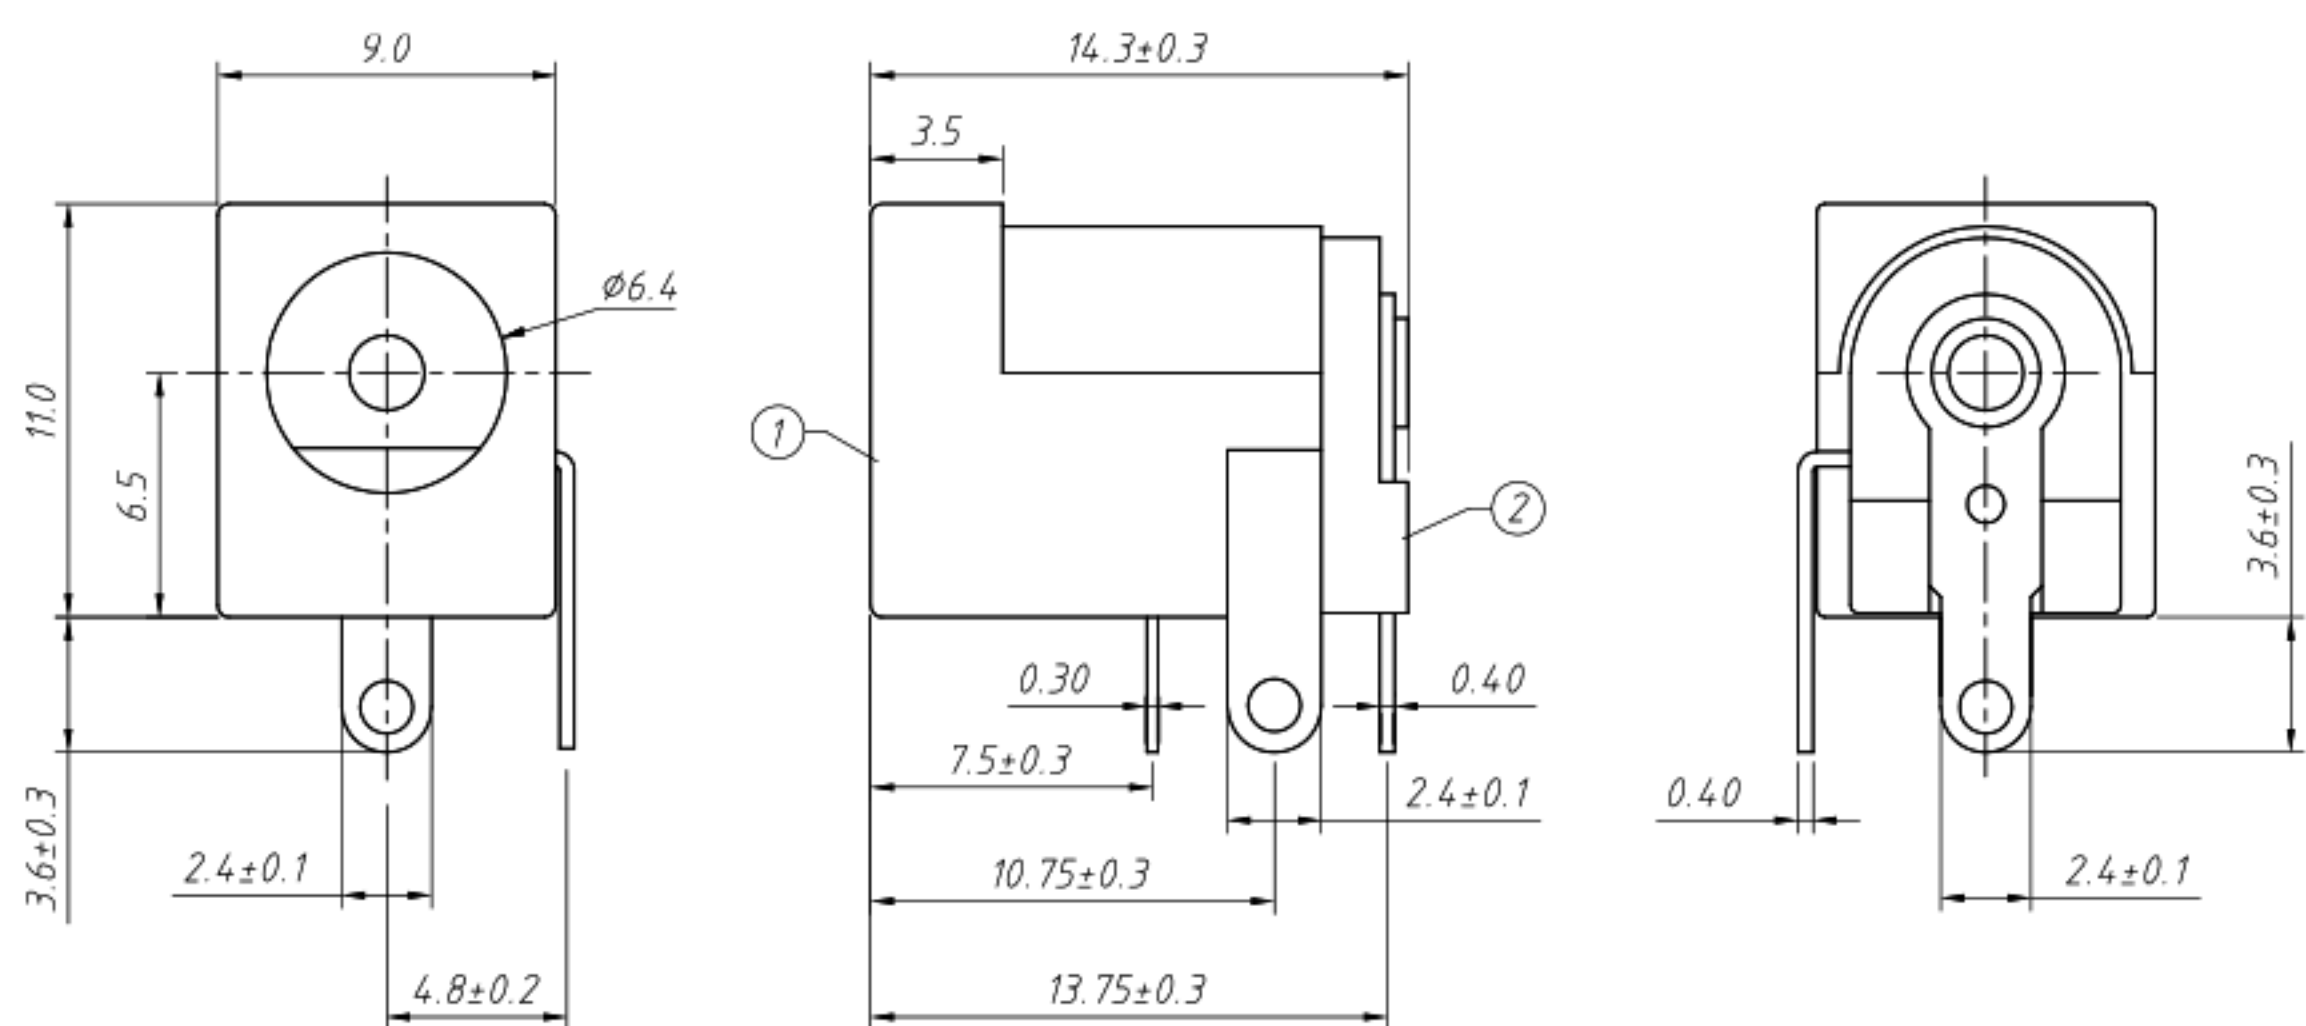


PCB LAYOUT TOP VIEW

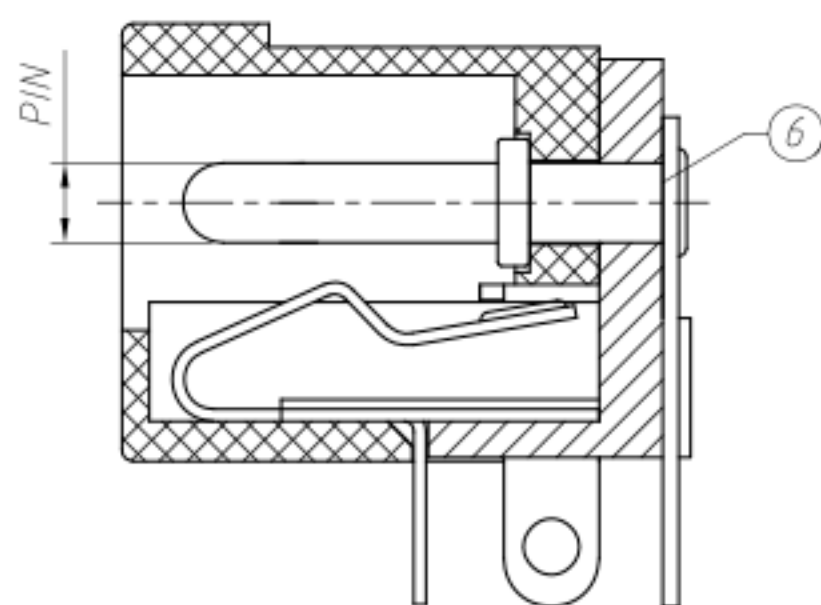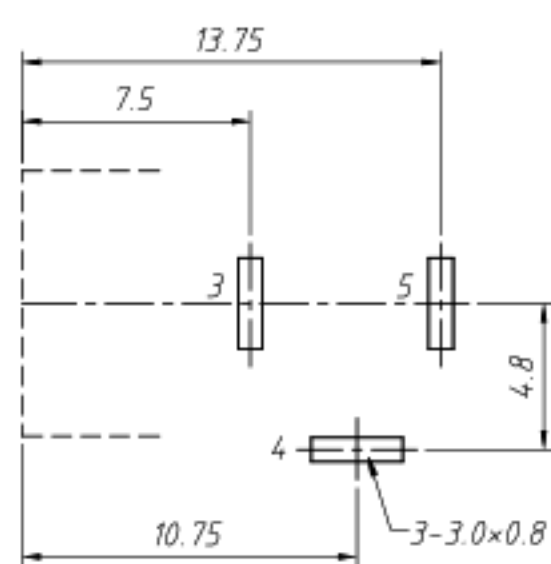

SCHEMATIC



PIN	Ø2.0	Ø2.5
APPD		

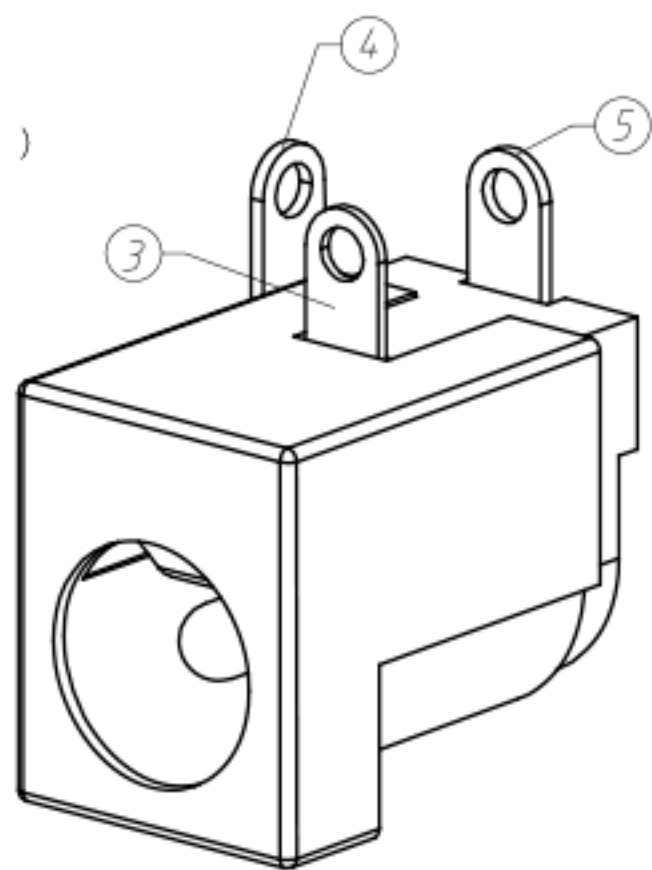

SPECIFICATION

Rated Load: DC 30V 0.5A

Contact resistance: 30mΩ, max

Insulation resistance: 100MΩ, min

Withstand Voltage: AC500V

Actuating Force: 3~20N

Life: 5000 cycles

Operating Temperature: -30°C ~ 70°C

GENERAL TOLERANCE	PROJECTION	
X. ±0.50	UNITS	mm
.X ±0.25	SCALE	1:1
.XX ±0.10	Draw by:	Jenny
ANGLE TOLERANCE	Check by:	
X. ±5°	Date	2018-03-01
.X ±3°	SHEET	1 OF 1
.XX ±2°		

NO.	Description	QTY	Material	Plating
1	Housing	1	PBT	---
2	Cover	1	PBT	---
3	Spring Piece	1	Bromze	Sn-Plating
4	Curve Piece	1	Brass	Sn-Plating
5	Flat Foot	1	Brass	Sn-Plating
6	PIN	1	Brass	Ni-Plating